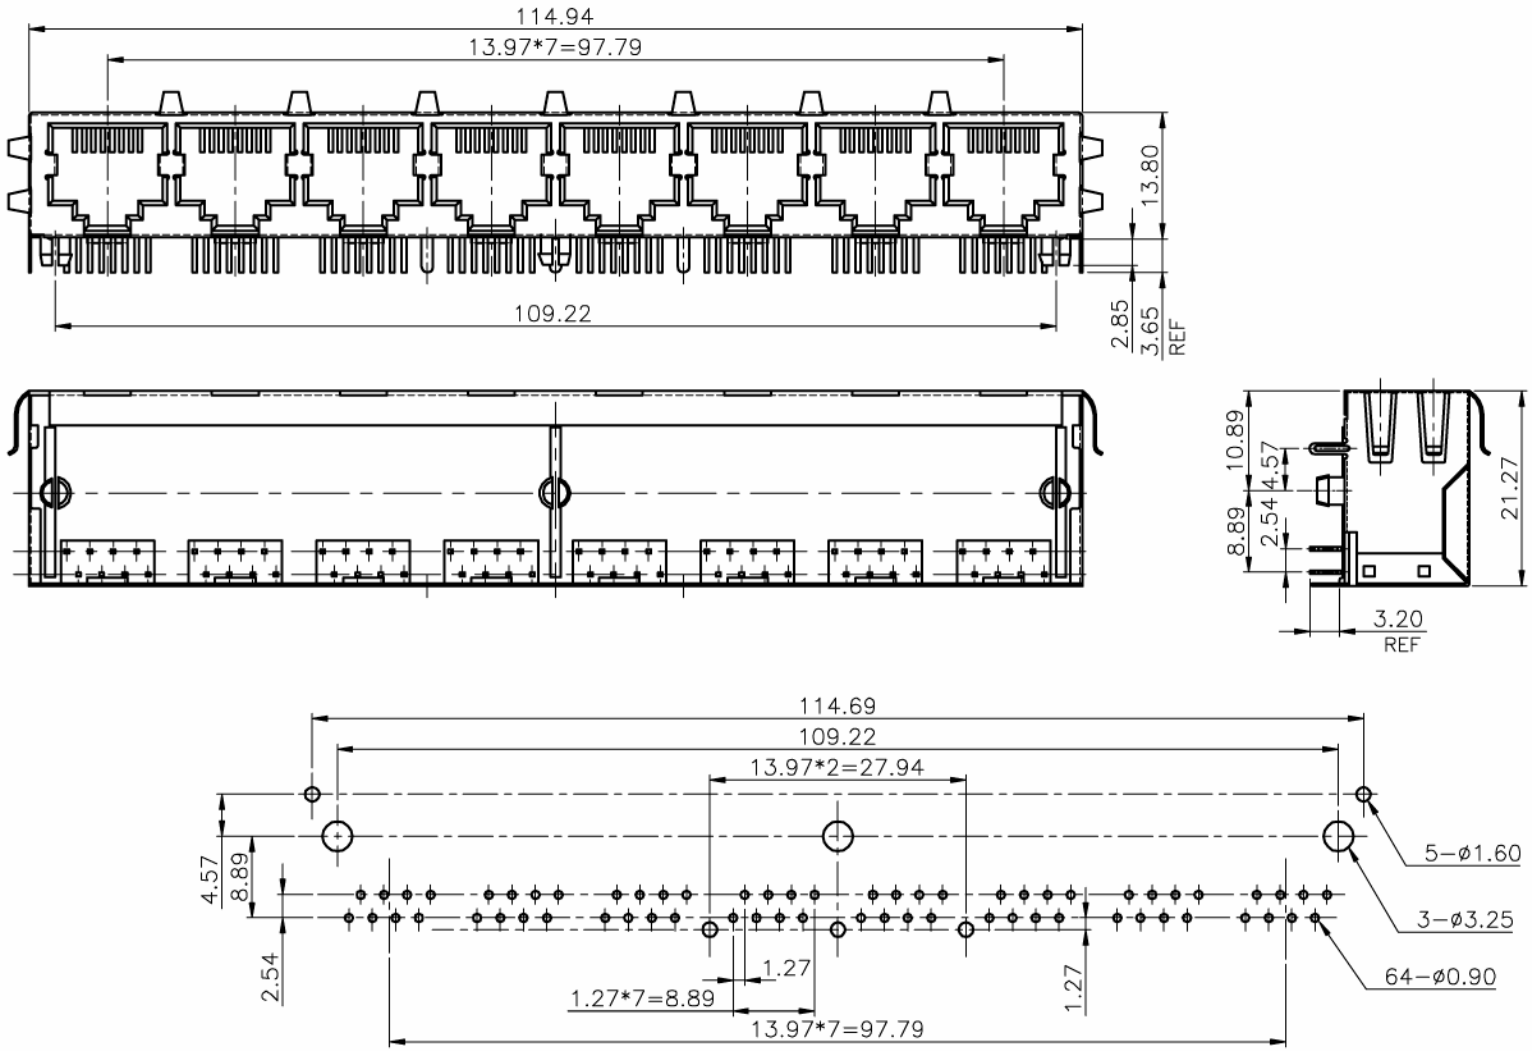

Materials:

Shielded: 0.25mm Thickness Copper Alloy With Nickel
Housing: Standard Material Glass Filled Polyester UL 94V−0 Standard Colour (Black)
Contact: 0.35mm Thickness Alloy C5210,Gold Plating Over Nickel in Contact Area,
Tin Plating Over Nickel in Solder Area
Gold Plating: Selective Gold Plating

REVISION	日期 DATE

TOLERANCE	
.XXX	±0.10
.XX	±0.25
.X	±0.38
X	±0.50
APPD.	
CHKD.	
DR.	

ARTICLE: MULTI−PORT PCB JACK (Shielded 8Ports)

DWG NO. 301208ST

mm	SCALE 1.8/1	SHEET 1/1	REV. A